

# Q Profile half cylinder SX 8-F


greenteQ 6-pin profile-cylinder, EN 1303:2005/AC:2008 certified.

## Properties:

greenteQ profile half cylinder SX 8-F are made off brass matt nickel-plated and the standard cylinder has a 6 pin system. They are tested and certified according to EN 1303:2005/AC:2008 and have an 8-fold adjustable cam. The basic length of the greenteQ profile half cylinders SX 8-F is 30mm; available extensions by 5mm are possible. The cylinders are delivered with 3 keys. greenteQ profile half cylinders SX 8-F are keyed different (every cylinder has individual locking. The 3

keys delivered with the cylinder aren't useable for other cylinders) or keyed alike (all cylinders with the same locking could be opened or closed with one key). If needed key blank for keyed different cylinders or keys for keyed alike cylinders are available.

## Product picture and technical drawing:

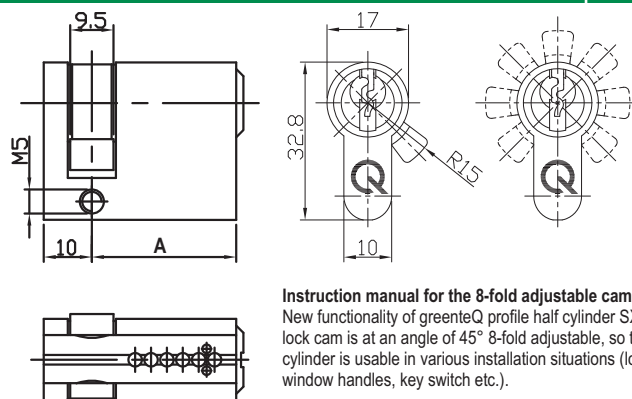

**Instruction manual for the 8-fold adjustable cam**  
New functionality of greenteQ profile half cylinder SX 8-F: The lock cam is at an angle of 45° 8-fold adjustable, so that the cylinder is usable in various installation situations (lockable window handles, key switch etc.).

This is how it works:  
Press the thrust bolt on the back of the cylinder with a pointed object (key, fixing screw etc.); turn the lock cam in the desired position; release the thrust bolt; the thrust bolt engages then automatically.

## Technical data:

Material of profile cylinder	brass
Surface	satın nickel-plated
Pins	6
Certification acc. to	EN 1303:2005/AC:2008
Cam	8-fold adjustable
Keys	3
Fixing screw	M5 x 50 mm and M5 x 80 mm
Packing unit	1 piece

(10 pieces per box / 50 pieces in carton)

## Certificationkey acc. to EN 1303 : 2005 / AC : 2008

1	2	3	4	5	6	7	8
Category of use	Durability	Door mass	Fire resistance	Safety	Corrosion resistance and temperature	Key related security	Attack resistance
1	6	0	0	0	C	6	0




The greenteQ Profile half cylinders SX 8-F are available in the following versions:

### Length A (Type)

- 30 mm (SX 30 8-F)
- 35 mm (SX 35 8-F)
- 40 mm (SX 40 8-F)
- 45 mm (SX 45 8-F)
- 50 mm (SX 50 8-F)
- 55 mm (SX 55 8-F)
- 60 mm (SX 60 8-F)
- 65 mm (SX 65 8-F)
- 70 mm (SX 70 8-F)

### Advise:

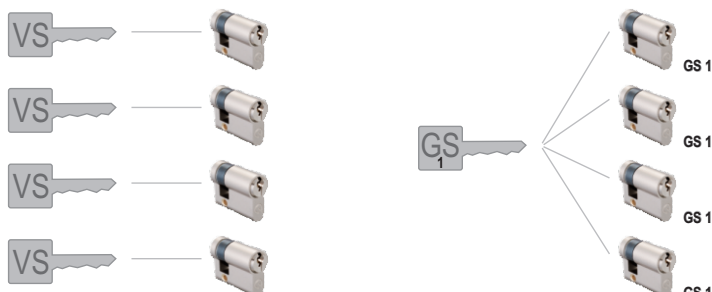

VS: keyed different, GS (1-5): keyed alike

## PRODUCT DATA SHEET

### CYLINDER - Profile half cylinder SX 8-F

Instructions for use, performance and product data, and all other technical data for greenteQ products are general guidelines only. They describe the performance characteristics and material composition of our products. However, they constitute no guarantee according to § 443 BGB. Due to the various application possibilities it is the user's sole responsibility to satisfy himself that the product is adequate for his intended purpose. Any technical consultation with VBH, whether verbal, written or in the form of test samples is for your information only and is absolutely non-committal.

greenteQ

Edition 06/2014 | www.vbh.de